


## INSTALLATION INSTRUCTIONS

<b>PART DESCRIPTION:</b>			
<b>Toyota Landcruiser 300 Lower Control Arms</b>			
<b>PART LISTING</b>			
ITEM#	PART#	QUANTITY	DESCRIPTION
1		2	LOWER CONTROL ARMS

**NOTE:** Read and understand these installation instructions before beginning the installation process. Retain these installation instructions for future reference. It is recommended that this item is to be installed by a qualified person.

CAUTION
Please ensure all bolts are tightened to correct torque setting. Recheck in 500km. Make sure the vehicle's wheels have been chocked before starting any work.

Size	Torque (Nm)	Torque (ft-lb)
M14	135	96

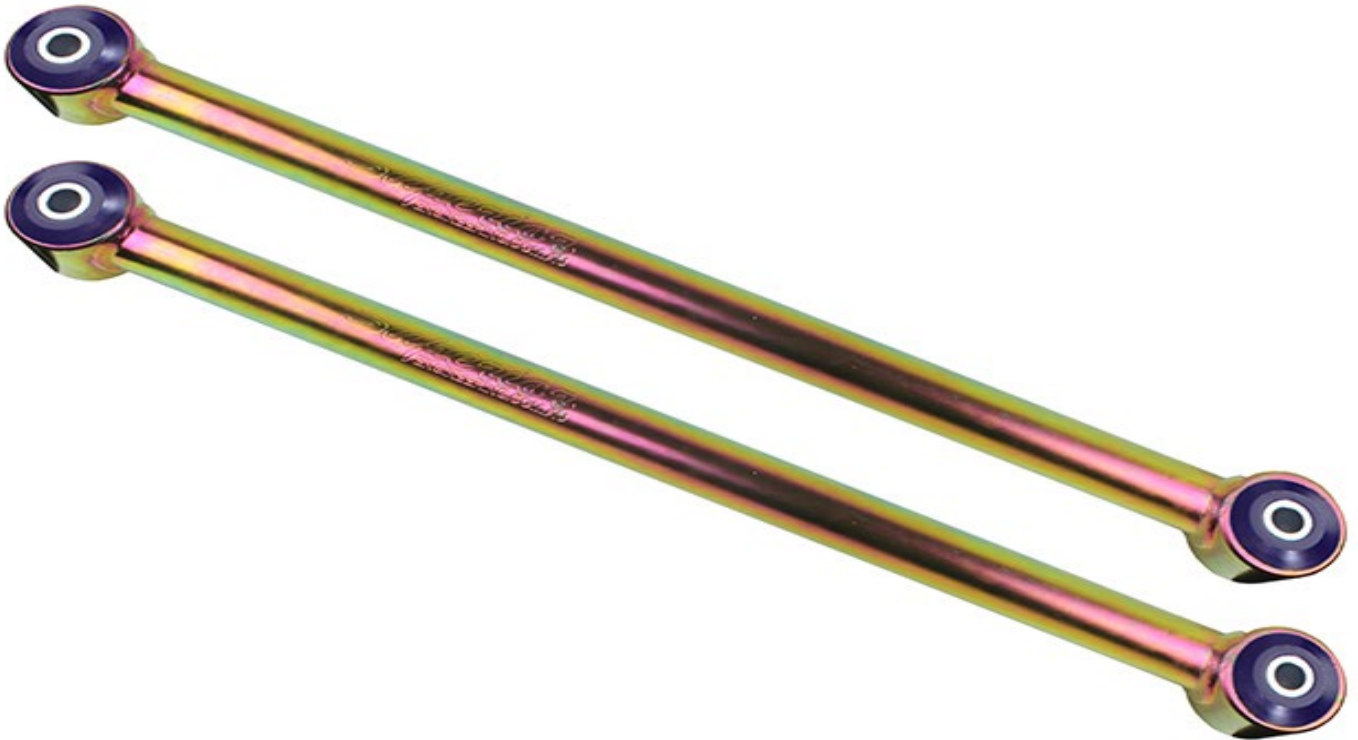

8 Chrome Court Burpengary 4505 QLD AUSTRALIA  
 (07) 5433 1411

## INSTALLATION INSTRUCTIONS

1. Chock the vehicle's front and rear wheels with the vehicle in gear or park with the handbrake on.
2. Remove standard lower control arm as per vehicle service manual.
3. Loosely fit the Superior Engineering Lower Control Arm to the OE mount in the chassis. Then loosely fit the other end of the control arm to the OE mount on the diff (this may involve moving the diff backwards or forwards this is possible by rotating the tyre.)
4. **NOTE:** The Superior Engineering logo will be engraved into the arms so when fitted correctly the logo will be the right way up facing out and closest to the chassis mount.
5. Tighten to the correct torque settings making sure all bolts have 263 Loctite.  
**NOTE:** Final tensioning of arms should only be done once vehicle is resting at ride height on the ground.

## INSTALLATION INSTRUCTIONS



8 Chrome Court Burpengary 4505 QLD AUSTRALIA  
(07) 5433 1411

## INSTALLATION INSTRUCTIONS

