
TRAILMAX







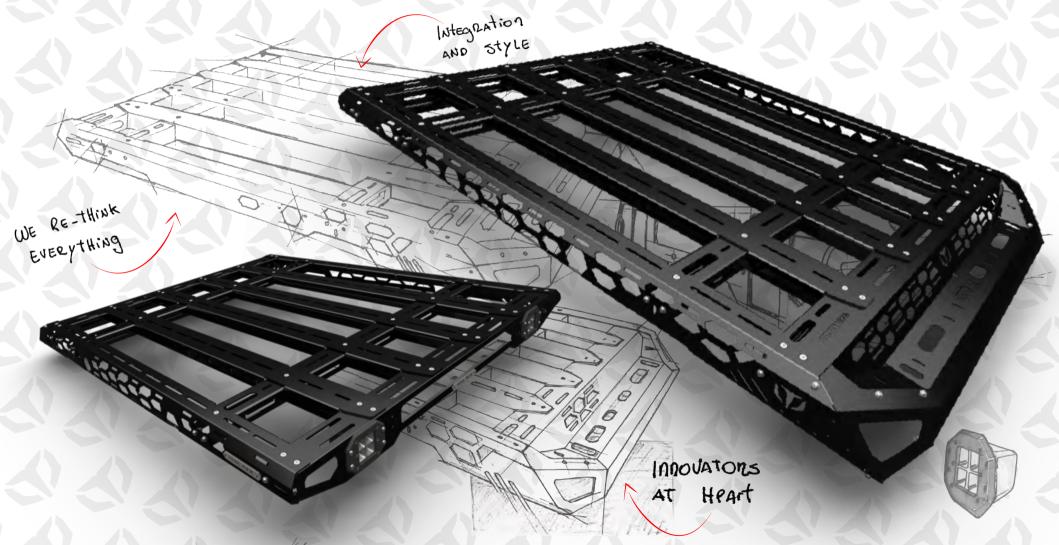

Usage Information

TrailMax products should be installed strictly in accordance with the instructions provided.



Manufacturer's load limit is to be used for weight allowance if it is lower than your TrailMax roof rack system.

*The weight of your roof rack system will count towards the manufacturer's load limit.



Do not modify any part of your TrailMax rack system.

Do not install roof rack system onto previously modified roof.



Always ensure your load is securely fastened. Use only non stretch fastening ropes or straps to attach cargo to roof racks.



The load must be distributed evenly over the system to achieve maximum load and avoid destabilization while driving.

For loading tips see trailmax.com.au.



Discover the complete line of Trailmax accessories







TMX RR 104028 BOLT KIT					
Item N⁰	Part	Description	Qty		
16	M6 x 20 Alen Bolt	0	24		
26	M6 Washer		24		
17	M6 x 16 Countersunk		36		
18	M6 Nylook Flange nut		60		

TMX RR 104028 ONE SET					
MATERIAL	THIKNESS	PART NUMBER	QUANTITY	REFERENCE	
AUMNUM	4mm	TMX RR 001 104028	1LH1RH	1	
	4mm	TMX RR 005 104028	4	5	
ALUMINEM	3mm	TMX RR 006 104028	2	6	
AUMNUM	2mm	TMX RR 002 104028	1	2	
	2mm	TMX RR 003 104028	1	3	
	2mm	TMX RR 004 104028	1	4	
	2mm	TMX RR 007 104028	1LH1RH	7	
MILD STEEL	3	TMX RR 013	1LH1RH	8	
	3	TMX RR 014	2	10	
STAINLESS STEEL	1.6	TMX RR 009	3	9	











- mtrailmax.com.au
- **1** 1300 885 841

- trailmax_australia
- **1** TrailMax

