



GRUNT

INSTALLATION INSTRUCTIONS TOYOTA HILUX SLOW DOWN EASY UP STRUTS
PART NUMBER: GUDSTH15



1: Remove tailgate strap bolt *see page 5



2: Remove body strap bolt *see page 5



3: Remove the two tail light bolts followed by the light assembly



4: Factory hole that the DOWN strut mounts to



5: Insert the strut & strap through the hole as shown placing the thin washer against the body




6: Place the thicker washer on the back followed by the friction nut then tighten

THESE INSTRUCTIONS ARE A GUIDE WE ALWAYS RECOMMEND BEING INSTALLED BY A PROFESSIONAL & TAKE NO RESPONSIBILITY FOR DAMAGE CAUSED BY INCORRECT FITMENT OF THE PRODUCT TO YOUR VEHICLE



GRUNT

INSTALLATION INSTRUCTIONS TOYOTA HILUX SLOW DOWN EASY UP STRUTS
PART NUMBER: GUDSTH15

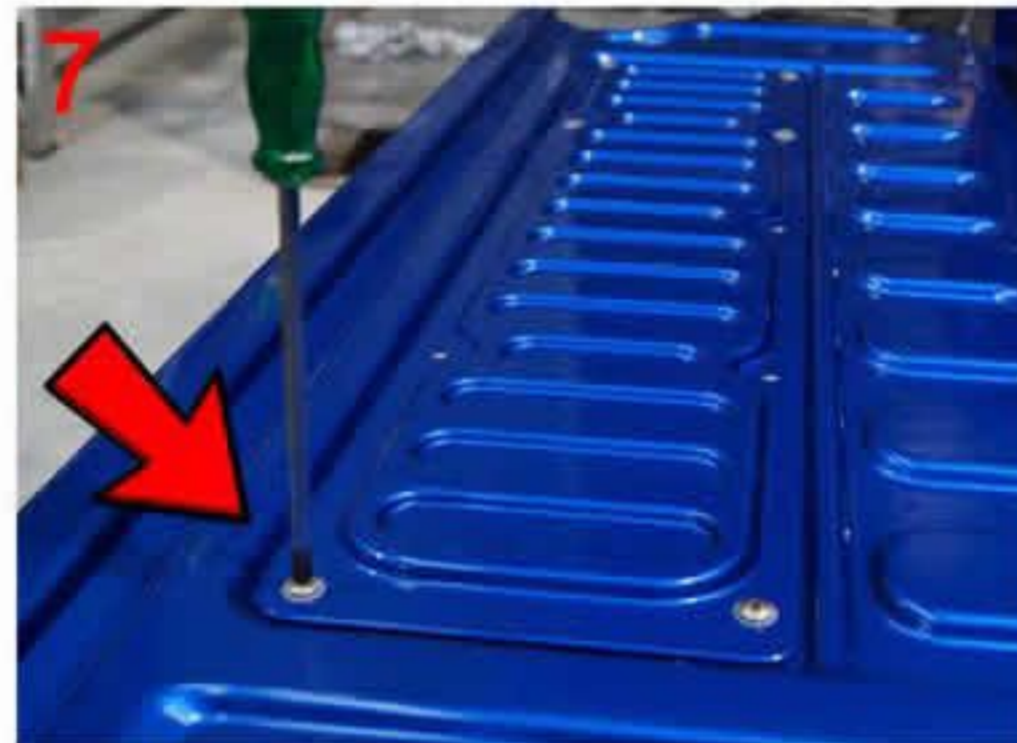

7: Remove tailgate access panel bolts as shown



8: Bolt on the template as shown and mark the tailgate



9: Drill the tailgate on the mark you just made
Tip: drill a small hole first then drill to 9mm



10: Installing the cable to tailgate



11: Place the bolt supplied through the hole
placing the thin washer against the tailgate first



12: Screw the friction nut inside the tailgate
placing the thicker on washer on first

**THESE INSTRUCTIONS ARE A GUIDE WE ALWAYS RECOMMEND BEING INSTALLED BY
A PROFESSIONAL & TAKE NO RESPONSIBILITY FOR DAMAGE CAUSED BY
INCORRECT FITMENT OF THE PRODUCT TO YOUR VEHICLE**



GRUNT

INSTALLATION INSTRUCTIONS TOYOTA HILUX SLOW DOWN EASY UP STRUTS
PART NUMBER: GUDSTH15



13: Tighten the tailgate strap bolt
DO NOT OVERTIGHTEN AS CABLE NEEDS TO MOVE FREELY



Hold the friction nut inside the tailgate with a 12mm spanner



14: Remove the rubber locating blocks from the tailgate and ute tub



16: Install the strut as shown then replace and tighten the bolt



15: Remove the tailgate hinge bolt closest to the body *see notes on page 4



THESE INSTRUCTIONS ARE A GUIDE WE ALWAYS RECOMMEND BEING INSTALLED BY A PROFESSIONAL & TAKE NO RESPONSIBILITY FOR DAMAGE CAUSED BY INCORRECT FITMENT OF THE PRODUCT TO YOUR VEHICLE



GRUNT

INSTALLATION INSTRUCTIONS TOYOTA HILUX SLOW DOWN EASY UP STRUTS
PART NUMBER: GUDSTH15



17: Install the cable locating rubber 80mm back from the body as pictured



18: Reinstall the taillight



19: Repeat the process on the passenger side for the EASY UP strut removing the spacer once installed

*** In some cases these bolts can prove difficult to remove this is why we recommend installation to be completed by a professional**



THESE INSTRUCTIONS ARE A GUIDE WE ALWAYS RECOMMEND BEING INSTALLED BY A PROFESSIONAL & TAKE NO RESPONSIBILITY FOR DAMAGE CAUSED BY INCORRECT FITMENT OF THE PRODUCT TO YOUR VEHICLE