

Fitting Instructions #TRC540IS

Nissan Navara D40 2005 – 2015 NP300 2015 - Current

Adjustable Camber/Caster Upper Control Arms



1. Before beginning any alignment work, always check for loose or worn parts, proper tyre pressures, and odd tyre wear patterns. Replace any loose or worn parts before setting alignment;
2. Raise vehicle by the chassis and support with jack stands. Remove front tyre and wheel assemblies;
3. Remove split pin and nut holding OEM ball joint to spindle. Break the taper between the ball joint stud and spindle and remove the ball joint from the spindle. Support the spindle so no strain is applied to ABS wiring or brake lines;
4. Remove the nut mounting bolts and remove the bolts and arm.

Note: To provide clearance to remove the rear bolt on the drivers side, it is necessary to remove bolt holding steering shaft to the rack. (Before removing bolt on steering shaft, mark position with a marker to maintain alignment when reassembling if shaft becomes separated) Once the bolt on the steering shaft is removed, move the shaft so the bolt can be removed (shaft may need to be removed to remove bolt), additional components in the engine compartment may need to be removed;

5. Using supplied grease only, lightly coat the ends of the bushing;
6. Install the control arm to the vehicle;

Important: Unlike OEM rubber bushings, SuperPro bushings pivot freely and so can be torqued without applying vehicle weight;

7. Install the star plate over the hex on the ball joint per the chart below to achieve the desired caster change relative to the stock arm. (For most vehicles with 2" of lift, it is recommended initially to set the ball-joint in the position "A" (Figure 02) for max. caster change and make necessary adjustments using different positions on each side, if needed, to achieve desired cross-caster setting.) Insert the ball joint up through the bottom of the arm, indexing the star plate in the machined slot, and then install the top washer and nut. Position in full negative camber position of the slot and tighten nut for initial alignment readings;
8. Insert the ball joint stud into the spindle, install the supplied castle nut and torque to 110Nm. Tighten further until the supplied split pin can be installed;
9. Re-install the tyre and wheel assembly. Lower vehicle and take alignment readings. Adjust camber by loosening the top nut and sliding the ball joint in the control arm slot. Adjust caster by loosening the top nut and repositioning the star plate to rotate the ball joint relative to the arm. (It will be necessary to raise the vehicle to make these adjustments);
10. When final caster/camber settings are achieved, torque the top ball joint nut to 143 Nm. adjust toe, road test the vehicle.

Camber and caster can be set with the upper control arm, as well as the OEM lower control arm camber pins. It is recommended to set the ball-joint in the position "A", then make necessary adjustments to achieve the desired camber and caster using the upper control arm and fine tune with the lower control arm.

Right Hand Side Arm


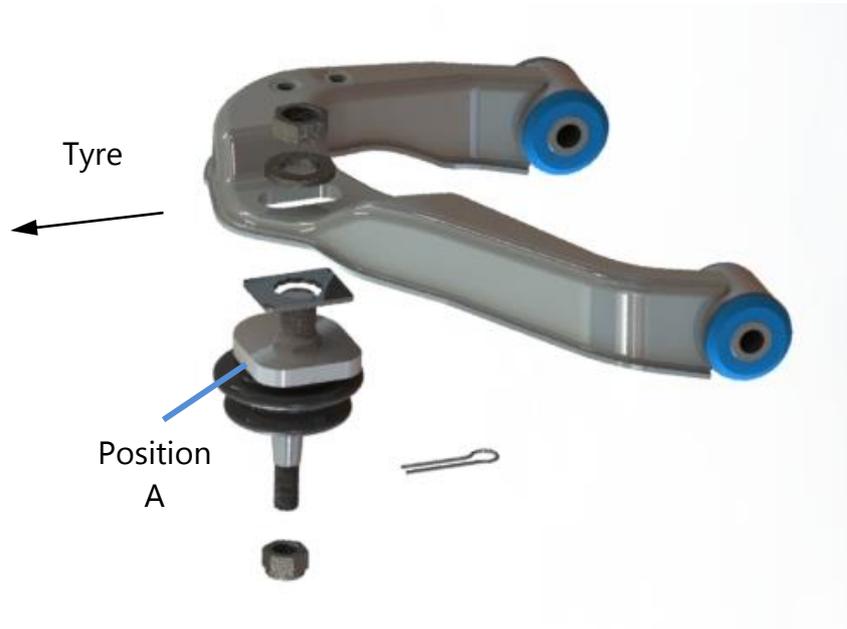


Figure 01 – Upper Control Arm installation - Ball joint in the position "A"

LEFT FRONT CASTER CHANGE

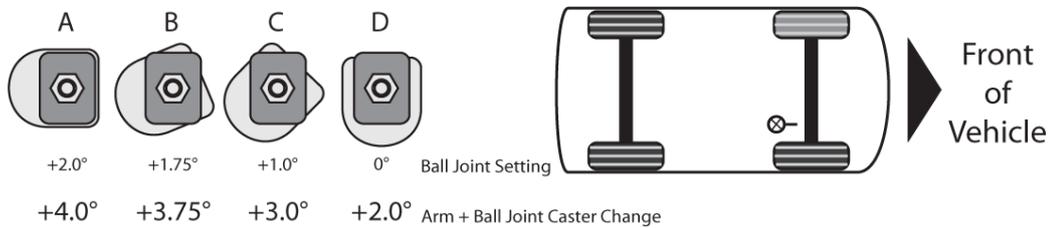

RIGHT FRONT CASTER CHANGE

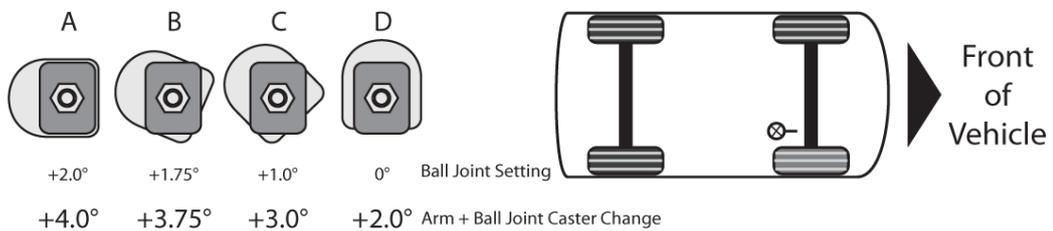


Figure 02 – Caster Settings